
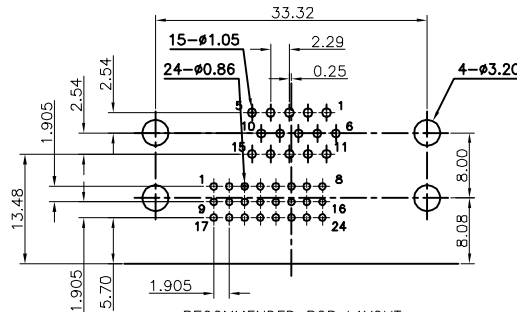
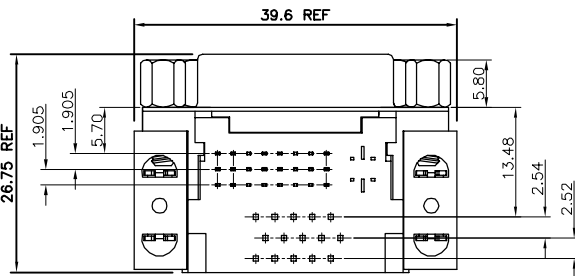
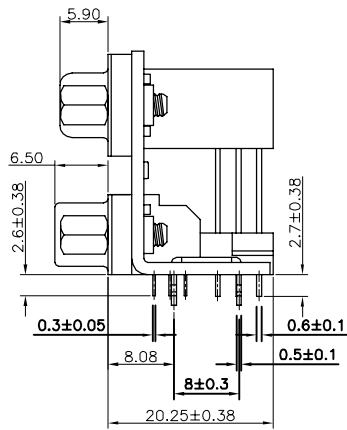


NOTES:

1. MATERIAL:
  - 1.1 INSULATOR: PBT WITH 30% G.F, UL94V-0, D-SUB COLOR: BLUE(661C). DVI COLOR: IVORY.
  - 1.2 COVER: PA66 WITH 30% G.F, UL94V-0, COLOR: IVORY
  - 1.3 CONTACTS: BRASS.
  - 1.4 SHELL: SPCC.
  - 1.5 RIVET: BRASS
  - 1.6 BOARDLOCK: BRASS
  - 1.7 BRACKET: SPCC
  - 1.8 SCREW: SPCC
2. FINISH:
  - 2.1 CONTACTS: GOLD PLATED(SEE TABLE) ON CONTACT AREA, 100μ" MIN. TIN PLATED ON SOLDER AREA, 50μ" MIN. NICKEL UNDERPLATED.
  - 2.2 SHELL: 50μ" MIN. NICKEL PLATED ENTIRE.
  - 2.3 RIVET: 50μ" MIN. NICKEL PLATED ENTIRE.
  - 2.4 BOARDLOCK: 100μ" MIN. TIN PLATED ENTIRE, 50μ" MIN. NICKEL UNDERPLATED.
  - 2.5 BRACKET: 50μ" MIN. NICKEL PLATED ENTIRE.
  - 2.6 SCREW: 50μ" MIN. NICKEL PLATED ENTIRE.
3. OTHERS:
  - 3.1 THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.

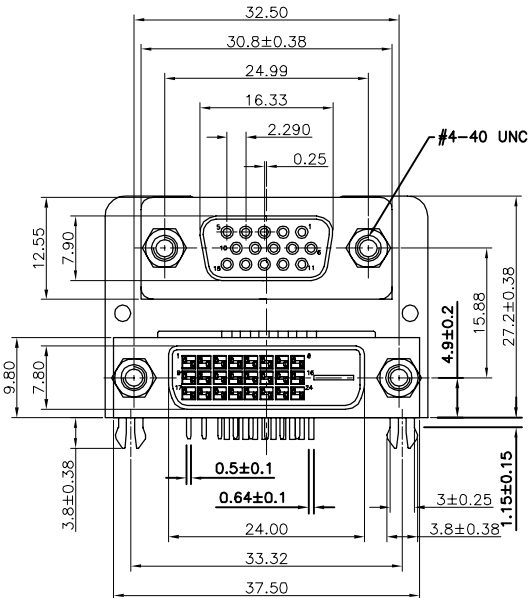


RECOMMENDED PCB LAYOUT  
THICKNESS: 1.6mm  
TOLERANCE: ±0.05mm

TRAY	15μ"	ASS'Y	ACNCB210016-102
		W/O	ACNCB210016-002
	G/F	ASS'Y	ACNCB210016-101
		W/O	ACNCB210016-001
PACKING	PLATING	SCREW	CPC P/N

REV.	DESCRIPTION	ECN NO.	NAME	DATE
A0	FIRST RELEASED	-	Owen	20-MAY-2014

REVISIONS



TITLE:  
COMBO D-SUB 15P + DVI-D 24+1P  
R/A DIP TYPE REC H=27.2mm

DWG. NO.:  
C= ACNCB210016

UNIT: mm    DWG SIZE: A4    SCALE: none    SHEET: 1 OF 1

DRAWN: Owen  
CHECKED: Vic  
APPROVED: Peter

