


NOTES:

- MATERIAL:
 - INSULATOR: LCP,UL94V-0, COLOR: BLUE.
 - CONTACT: 1-4PIN PHOSPHOR BRONZE, 5-9PIN BRASS.
 - SHELL: BRASS.
- FINISH:
 - CONTACT: GOLD FLASH PLATED ENTIRE, 80μ" MIN. TIN PLATED ON SOLDER AREA, 50μ" MIN. NICKEL UNDERPLATED OVERALL.
 - SHELL: 80μ" MIN. NICKEL PLATED ENTIRE, 20μ" MIN. COPPER UNDERPLATED OVERALL.
- SPECIFICATIONS:
 - CONTACT CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
 - OPERATING TEMPERATURE: -40°C ~ +85°C.
- OTHERS:
 - THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.
 - RESISTANCE TO SOLDERING HEAT: 265°C FOR 5 SECONDS, AND ONLY FOR WAVE SOLDERING PROCESS.

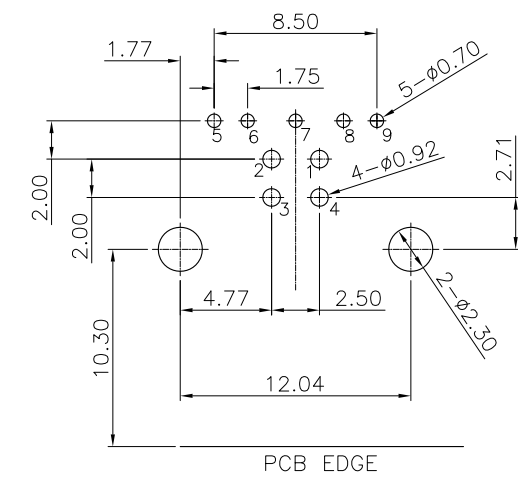

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

TRAY	ACNUB210080-006
PACKING	CPC P/N

REV.	DESCRIPTION	ECN NO.	NAME	DATE
A0	FIRST RELEASED	-	ENERGY	20-NOV-2014
REVISIONS				

DIM.	TOL.
X.	± -
X.X	± 0.30
X.XX	± 0.25
X.XXX	± 0.15
ANGL	± 3'

TITLE:	USB 3.0 B TYPE 9P R/A DIP REC 12.9H
DWG. NO.:	① ACNUB210080
UNIT:	mm
DWG SIZE:	A4
SCALE:	none
SHEET:	1 OF 1

DRAWN:	ENERGY
CHECKED:	DAVID
APPROVED:	PETER

RFQ NO.:
Q1405078