


- NOTES:
- MATERIAL:
 - INSULATOR: HIGH TEMPERATURE PLASTIC, UL94V-0, COLOR: BLACK.
 - CONTACTS: COPPER ALLOY,
 - SHIELD: STAINLESS STEEL,
 - GUARD PLATE: STAINLESS STEEL.
 - FINISH:
 - CONTACTS: GOLD(SEE TABLE) PLATED ON CONTACT AREA, TIN PLATED ON SOLDER AREA, NICKEL UNDERPLATED OVERALL.
 - SHIELD: NICKEL PLATED ENTIRE.
 - SPECIFICATIONS:
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 100V/MINUTE.
 - OTHER:
 - THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.

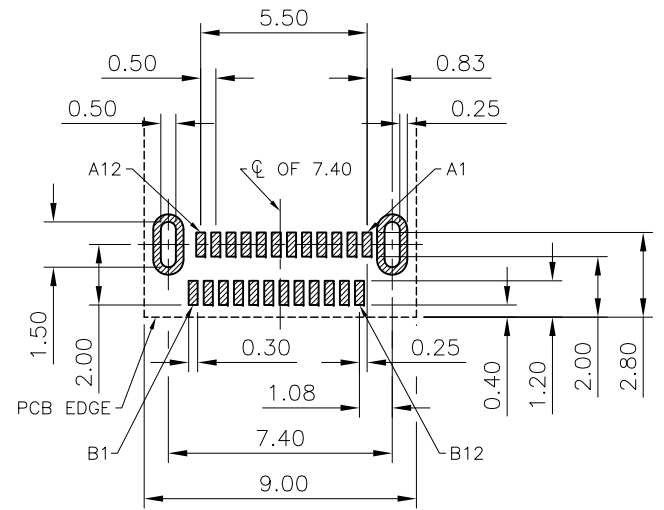

RECOMMENDED PCB LAYOUT
COMPONENT SIDE(TOLERANCE:±0.05mm)

REEL	G/F	ACNUB120011-001
PACKING	PLATING	CPC P/N.

DRAWN:
Rock


CHECKED:
Vic

APPROVED:
Kin



RFQ NO.:
Q1603020

REV.	DESCRIPTION	ECN NO.	NAME	DATE	DIM.	TOL.
A0	FIRST RELEASED	-	Rock	18-Apr-2016	X.	± -
					X.X	± 0.30
					X.XX	± 0.25
					X.XXX	± 0.15
					ANGL	± 3°



TITLE:
USB 3.1 TYPE C, 24P,
R/A, SMT, PLUG, H2.90mm

DWG. NO.:
C = ACNUB120011

UNIT: mm DWG SIZE: A4 SCALE: none SHEET: 1 OF 1