REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-11008)	TINA	11-010	01-07'2011
B	SEE ECN(3007-11214)	TINA	11-140	04-20'2011
C	SEE ECN(3007-11428)尺寸公差修改	Kaiser	11-300	07-07'2011

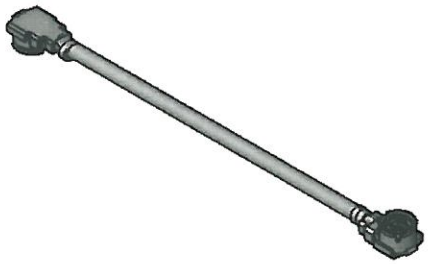

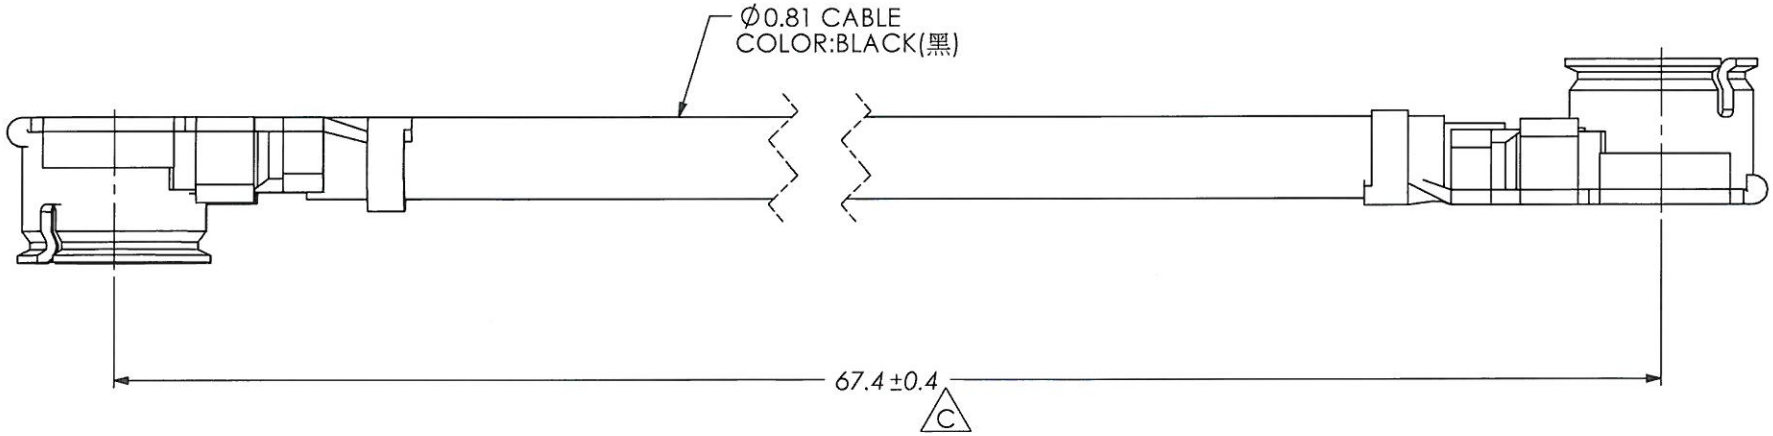

ELECTRICAL PERFORMANCE :
1.Impedance : 50 ohms
2.Frequency Range : DC~ 6 GHz
3.Working Voltage : AC60V Maximum
4.Dielectric Withstanding Voltage : AC200V Maximum

文件管制中心 100.7.7 發行章

DESCRIPTION	PART NUMBER	FINISHED	Q'TY
Ø0.81 Cable	Ø0.81 CABLE	BLACK	1
IPEX Connector	20367-001R	GOLD	2

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	

FINISH: SEE TABLE | MATERIAL: SEE TABLE

micon Precise Corp.

DRAWN BY:	TINA	DATE:	01-07'2011
ENGR BY:	TINA	DATE:	01-07'2011
APVD BY:	Jack	DATE:	7/7/2011

TITLE: IPEX TO IPEX FOR Ø0.81 CABLE 6.74CM
Model NO: IPEXIPEX081A-0674M
Drawing NO: IPEXIPEX081A-0674M

UNIT:	MM	SIZE: A4	REV. C	CAD FILE: Z:NEWDwg/CABLE/IPEX
SCALE:	8:1	SHEET	1 OF 1	