



REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-11083)	TINA	11-530	11-03'2011

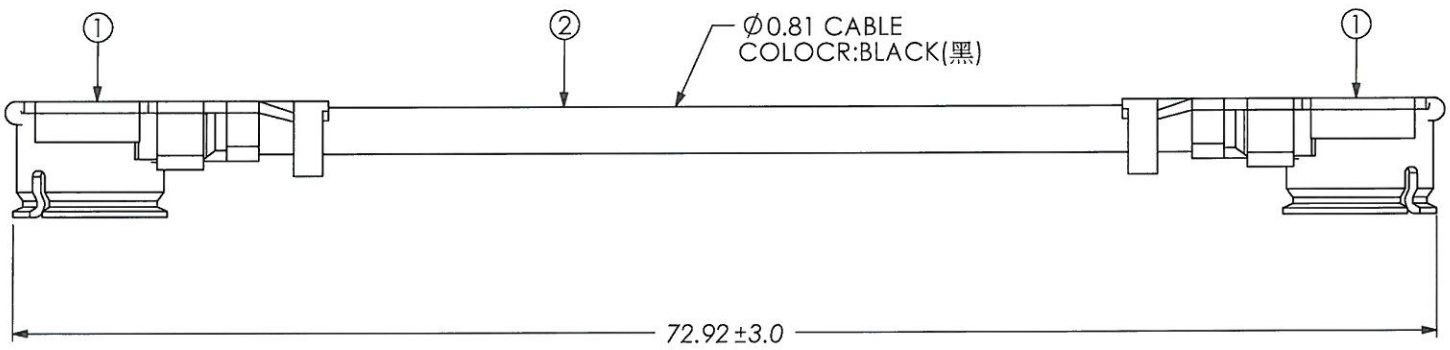

ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : DC~ 3 GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum



ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY
2	Ø 0.81 Cable	Ø0.81 CABLE	BLACK	1
1	IPEX Connector	20367-001R	GOLD	2

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION		ANGLE
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS

FINISH: SEE TABLE
 MATERIAL: SEE TABLE

nicon Precise Corp.

TITLE: IPEX TO IPEX FOR Ø0.81 CABLE 7.29CM

Model NO: IPEXIPEX081A-0729M

Drawing NO: IPEXIPEX081A-0729M

DRAWN BY:	TINA	DATE:	11-03'2011
ENGR BY:	TINA	DATE:	11-03'2011
APVD BY:	<i>Jerry</i>	DATE:	11/3/2011

UNIT:	MM	SIZE:	A4	REV.	A
SCALE:	8:1	SHEET	1	OF	1

CAD FILE:
Z:NEWDwg/CABLE/IPEX
IPEXIPEX/IPEXIPEX081A-0729M