



| REV. | DESCRIPTION | DRAWN | ECN | DATE |
|------|--------------------------|-------|--------|------------|
| A | NEW RELEASE (3005-11052) | TINA | 11-251 | 06-14'2011 |
| B | SEE ECN(3007-11363) | TINA | 11-259 | 06-17'2011 |
| C | 修改總長公差(3007-11447) | TINA | 11-319 | 07-18'2011 |

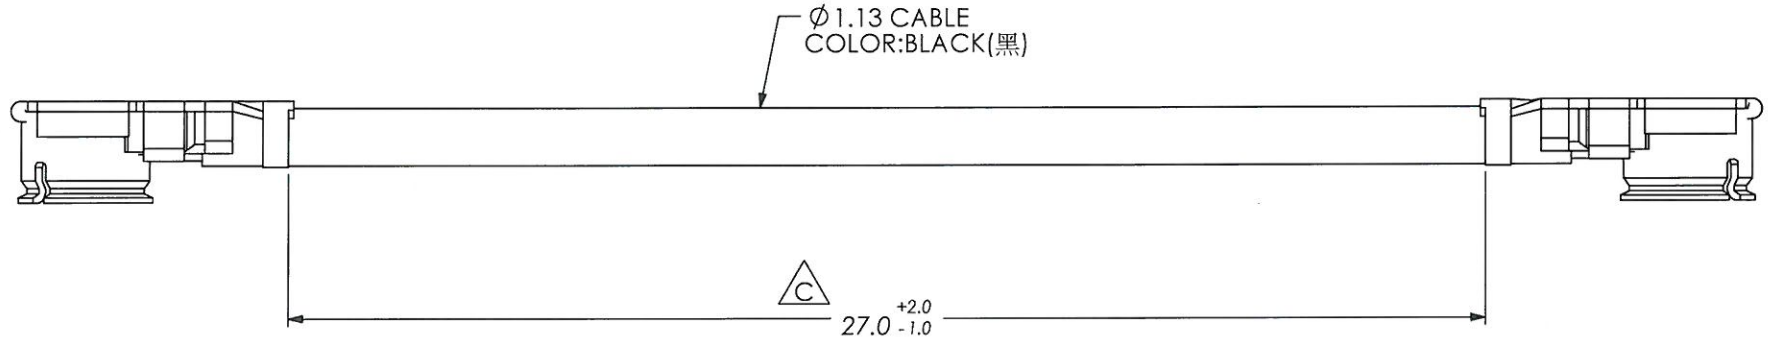

ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : DC~ 3 GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum

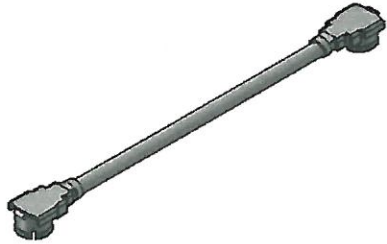

| | | | |
|----------------|---------------|----------|------|
| Ø1.13 CABLE | IM0113-A | BLACK | 1 |
| IPEX Connector | 20278-112R-13 | GOLD | 2 |
| DESCRIPTION | PART NUMBER | FINISHED | Q'TY |

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

| | | | |
|---------------------|-------------------|---------------------|-------|
| DIMENSION | | ANGLE | |
| INTEGRAL DIMENSIONS | ±1.0 | ANGULAR DIMENSIONS | ±5.0° |
| 1 PLACE DECIMAL | ±0.5 | HOLES UNDER Ø0.5 | ±0.1 |
| 2 PLACE DECIMALS | ±0.25 | ROUGHNESS | |
| | FINISH: SEE TABLE | MATERIAL: SEE TABLE | |

nicon Precise Corp.

| | | | |
|-----------|------------|-------|------------|
| DRAWN BY: | TINA | DATE: | 06-14'2011 |
| ENGR BY: | TINA | DATE: | 06-14'2011 |
| APVD BY: | <i>Jay</i> | DATE: | 7/8/2011 |

TITLE: IPEX TO IPEX FOR Ø1.13 CABLE 2.7CM

Model NO: IPEXIPEX113A-0027C

Drawing NO: IPEXIPEX113A-0027C

| | | | | | | | |
|--------|-----|-------|----|------|---|-----------|----------------------|
| UNIT: | MM | SIZE: | A4 | REV. | C | CAD FILE: | Z:NEW Dwg/CABLE/IPEX |
| SCALE: | 7:1 | SHEET | 1 | OF | 1 | | |