


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-6100)	TINA	06-331	11-28'2006

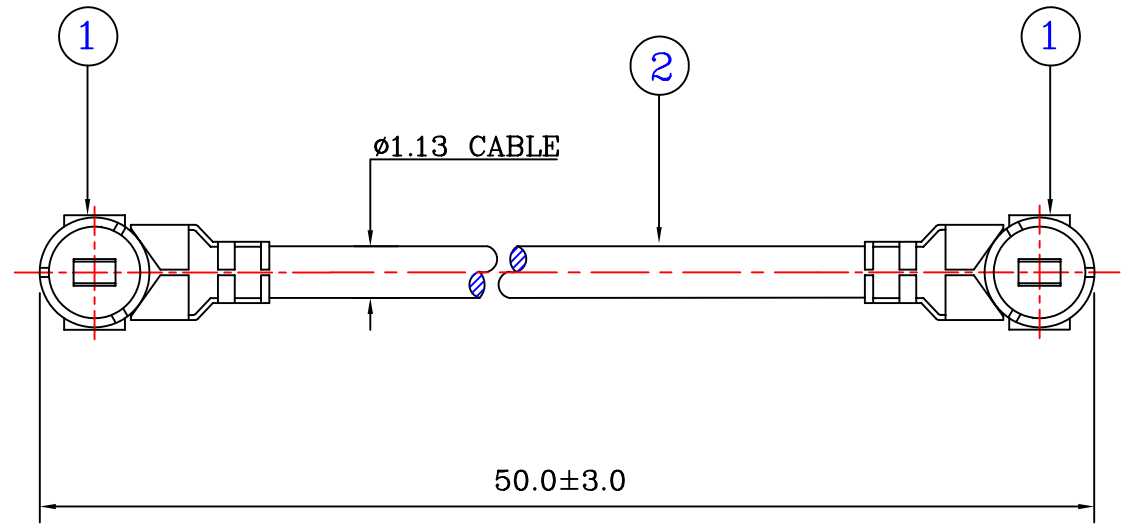

ELECTRICAL PERFORMANCE:

- 1.Impedance : 50 ohms
- 2.Frequency Range : 0 ~ 3GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum
- 5.Insulator Resistance : 500 Megohms Minimum

2	Ø1.13 CABLE	0000113A-0473M	BLACK	1
1	I-PEX	20278-111R-13	GOLD	2
ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	TOLERANCE	ANGLE	TOLERANCE
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.3	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.15	ROUGHNESS	

FINISH: SEE TABLE MATERIAL: SEE TABLE



TITLE: I-PEX TO IPEX Ø1.13 5.0 CM CABLE

Model NO: IPEXIPEX113A-0050C

Drawing NO: 12-IPEXIPEX113A-0050C

DRAWN BY:	TINA	DATE:	11-28'2006	UNIT:	MM	SIZE:	A4	REV.	A	CAD FILE :
ENGR BY:	TINA	DATE:	11-28'2006	SCALE:	2:1	SHEET	1	OF	1	Z:\NEW Dwg\CABLE\IPEX
APVD BY:		DATE:								