



REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-7090)	TINA	07-274	11-09'2007
B	59.0±3.0=>59.0±2.0 (3005-8006)	TINA	08-020	01-22'2008
C	SEE ECN (3007-12802)	TINA	12-652	11-13'2012

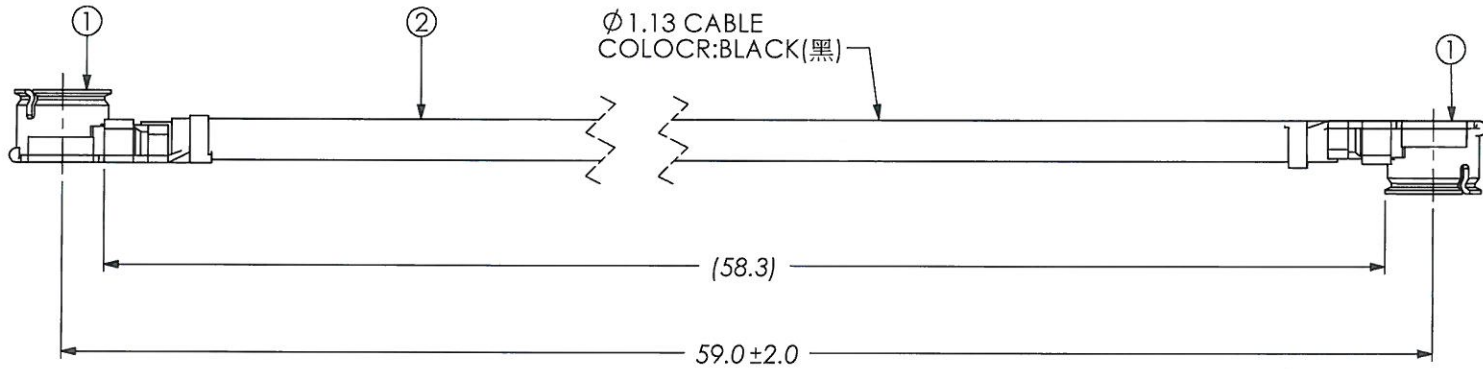

ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : 0 ~ 3 GHz
- 3.WORKING VOLTAGE:AC60V MAX.
- 4.DIELECTRIC WITHSYANDING VOLTAGE: AC200V MAX.

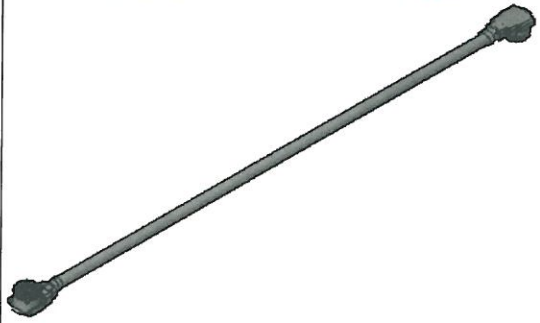


ITEMS	Micon P/N.	DESCRIPTION	FINISHED	Q'TY
2	XM0113-A	$\phi 1.13$ CABLE	BLACK	1
1	39001	IPEX CONN. (20278-112R-13)	GOLD	2

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION	TOLERANCE	ANGLE	TOLERANCE
INTEGRAL DIMENSIONS	± 1.0	ANGULAR DIMENSIONS	$\pm 5.0^\circ$
1 PLACE DECIMAL	± 0.5	HOLES UNDER $\phi 0.5$	± 0.1
2 PLACE DECIMALS	± 0.25	ROUGHNESS	



FINISH: SEE TABLE MATERIAL: SEE TABLE

nicon Precise Corp.

DWN BY:	TINA	DATE:	11-09'2007
CHK BY:		DATE:	
APVD BY:	Jris	DATE:	11/27/2012

TITLE: IPEX TO IPEX FOR $\phi 1.13$ CABLE 5.9 CM

Model NO: IPEX IPEX113A-0059C

Drawing NO: 12-IPEX IPEX113A-0059C

UNIT:	MM	SIZE:	A4	REV.	C
SCALE:	5:1	SHEET	1	OF	1

CAD FILE:
NEW DWG\CABLE\IPEX
IPEX IPEX113A-0059C