


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-11029)	TINA	11-084	03-15'2011

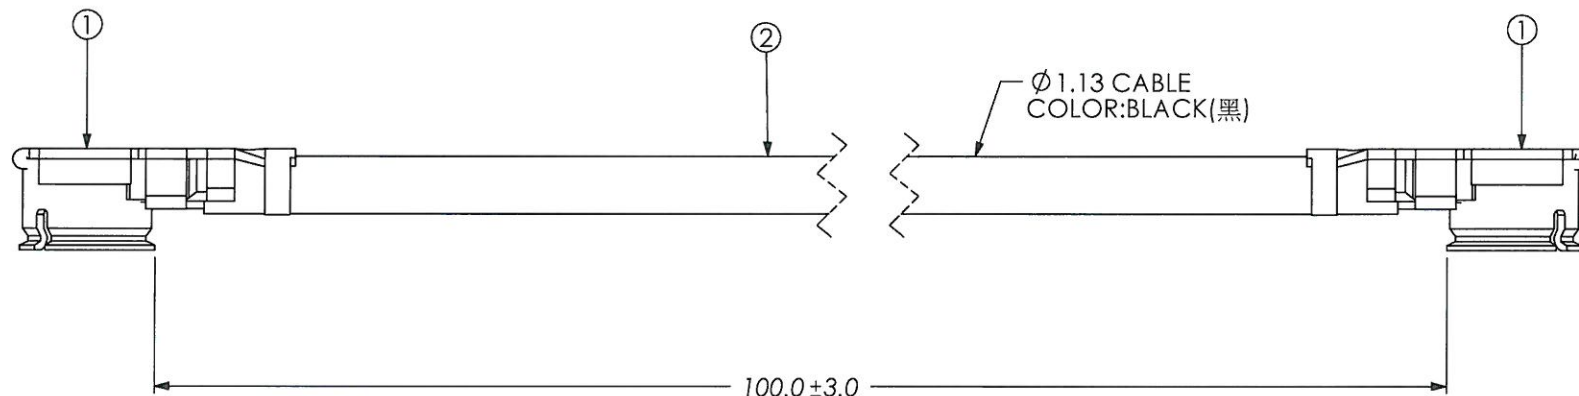

**ELECTRICAL PERFORMANCE :**

1. Impedance : 50 ohms
2. Frequency Range : DC~ 3 GHz
3. Working Voltage : AC60V Maximum
4. Dielectric Withstanding Voltage : AC200V Maximum
5. VSWR: DC ~ 3 GHz 1.3max.  
3 ~ 6 GHz 1.5max.

2	Ø1.13 CABLE	0000113A-1027M	BLACK	1
1	IPEX Connector	20278-112R-13	GOLD	2
ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY

**RoHS**

COMPLIANT

2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	
		FINISH: SEE TABLE	MATERIAL: SEE TABLE

**nicon** Precise Corp.

TITLE: IPEX TO IPEX FOR Ø1.13 CABLE 10CM

Model NO: IPEXIPEX113A-0100C

Drawing NO: IPEXIPEX113A-0100C

DRAWN BY:	TINA	DATE:	03-15'2011
ENGR BY:	TINA	DATE:	03-15'2011
APVD BY:	<i>Tina</i>	DATE:	<i>3/18/2011</i>

Drawing NO:	IPEXIPEX113A-0100C
UNIT:	MM
SIZE:	A4
REV.	A
CAD FILE:	Z:NEW Dwg/CABLE/IPEX
SCALE:	7:1
SHEET	1 OF 1