


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-9044)	TINA	09-193	07-15'2009

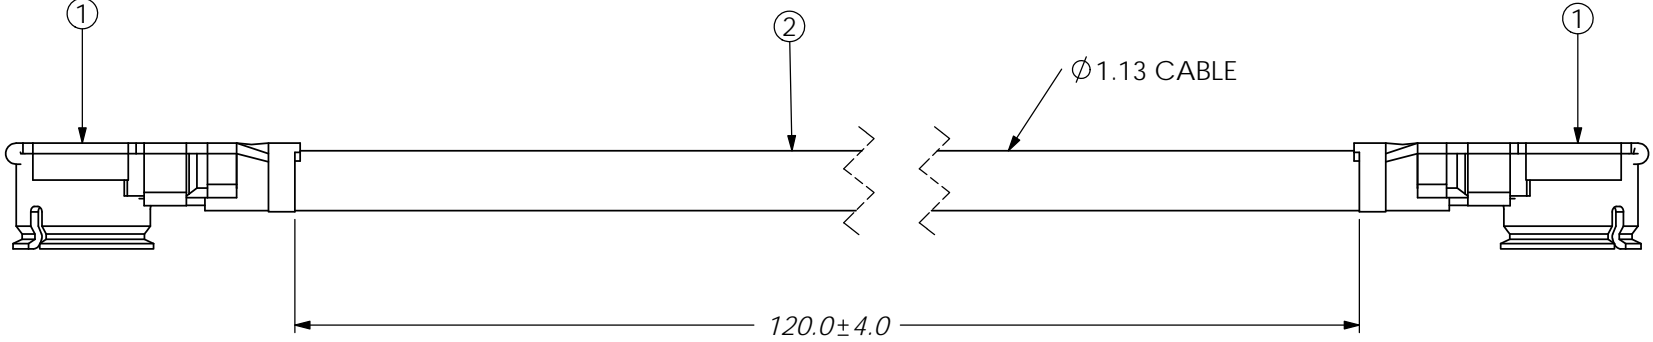

ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : DC~ 3 GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum
- 5.VSWR: DC ~ 3 GHz 1.3max.
3 ~ 6 GHz 1.5max.

2	Ø1.13 CABLE	0000113A-1280M	BLACK	1
1	IPEX Connector	20278-112R-13	GOLD	2
ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :			
DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	
	FINISH: SEE TABLE	MATERIAL: SEE TABLE	



TITLE: IPEX TO IPEX FOR Ø1.13 CABLE 12CM							
Model NO: IPEXIPEX113A-0120C							
Drawing NO: IPEXIPEX113A-0120C							
DRAWN BY:	TINA	DATE:	07-15'2009	UNIT:	MM	SIZE:	A4
ENGR BY:	TINA	DATE:	07-15'2009	REV.:	A	CAD FILE:	
APVD BY:		DATE:		SCALE:	7:1	SHEET:	1 OF 1
				Z:NEW Dwg/CABLE/IPEX			