


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-11028)	TINA	11-077	03-10'2011

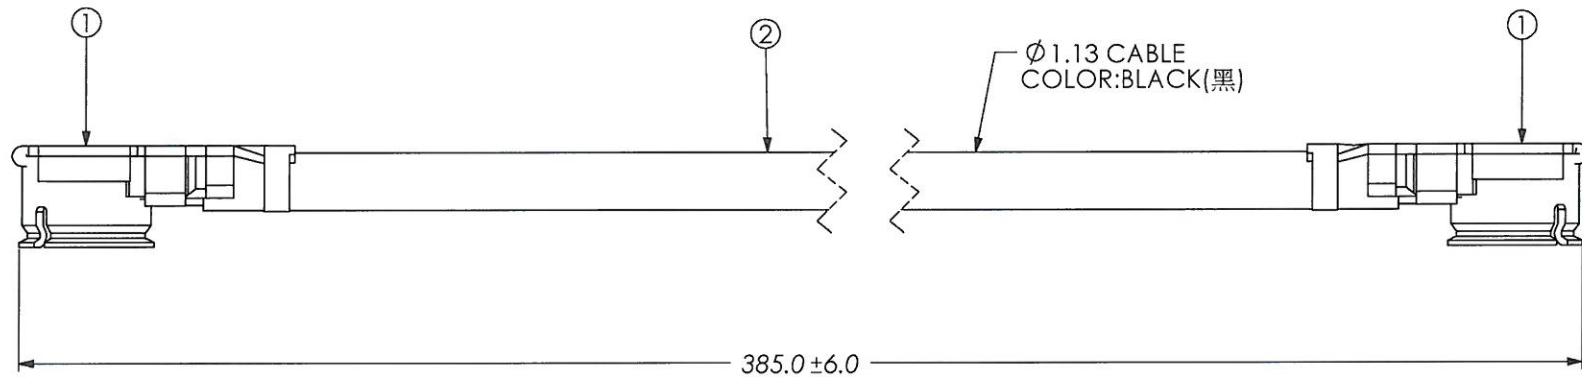

**ELECTRICAL PERFORMANCE :**

1. Impedance : 50 ohms
2. Frequency Range : DC~ 6 GHz
3. Working Voltage : AC60V Maximum
4. Dielectric Withstanding Voltage : AC200V Maximum

2	Ø 1.13 CABLE	Ø 1.13 CABLE	BLACK	1
1	IPEX Connector	20278-112R-13	GOLD	2
ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY

**RoHS**

COMPLIANT  
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	

	FINISH: SEE TABLE		MATERIAL: SEE TABLE
--	-------------------	--	---------------------

**nicon** Precise Corp.

DRAWN BY:	TINA	DATE:	03-10'2011
ENGR BY:	TINA	DATE:	03-10'2011
APVD BY:	<i>JCS</i>	DATE:	<i>3/6/2011</i>

TITLE: IPEX TO IPEX FOR Ø 1.13 CABLE 38.5CM

Model NO: IPEXIPEX113A-0385C

Drawing NO: IPEXIPEX113A-0385C

UNIT:	MM	SIZE:	A4	REV.	A	CAD FILE:	Z:\NEW DWG\CABLE\IPEX
SCALE:	7:1	SHEET	1	OF	1		