


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-8009)	TINA	08-036	02-22'2008

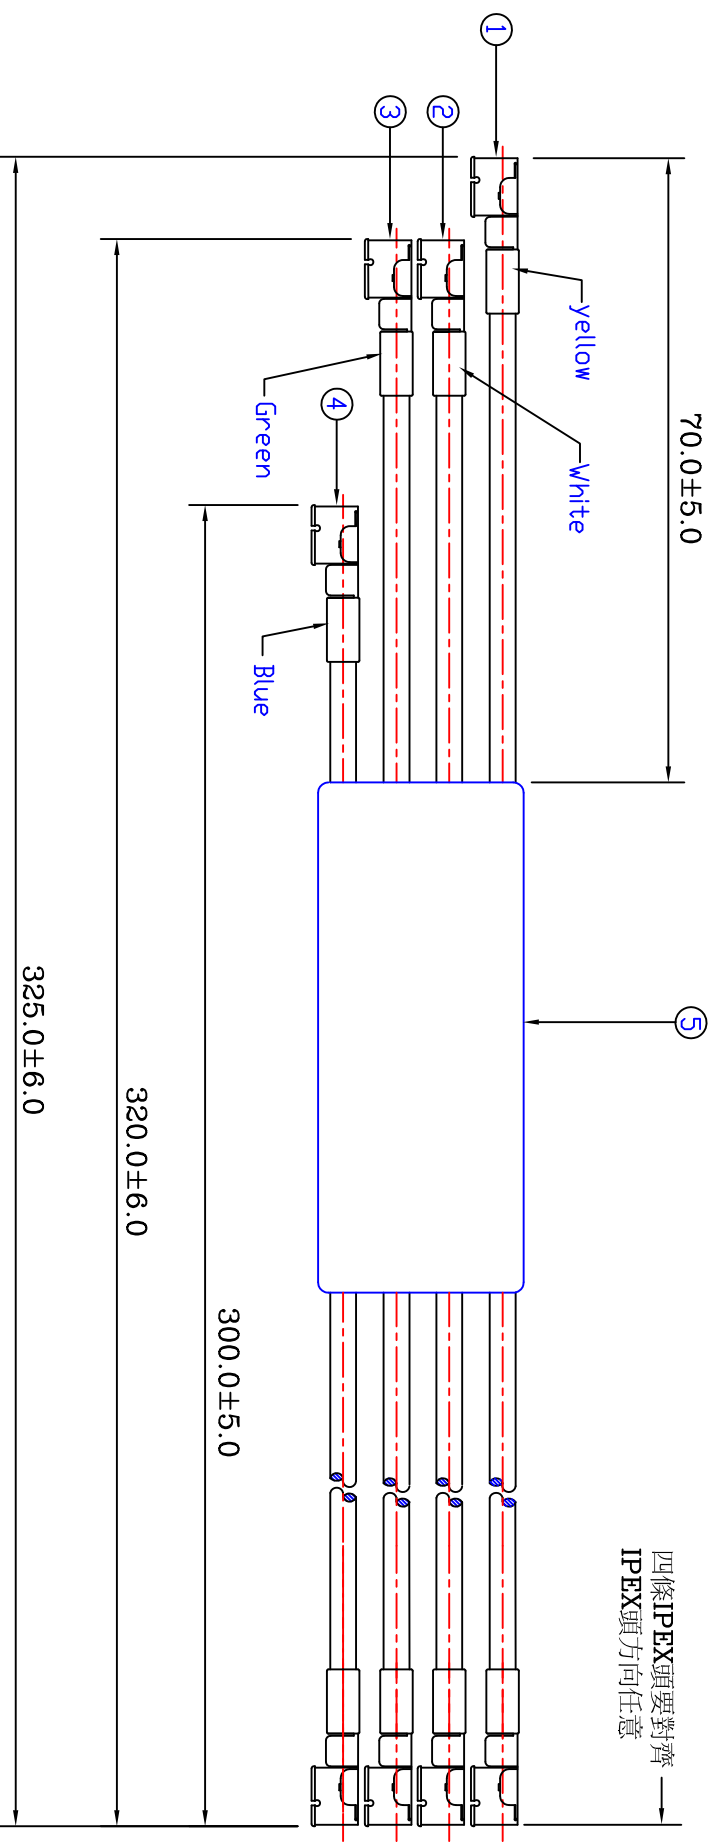

ELECTRICAL PERFORMANCE:

1. Impedance : 50 ohms
2. Frequency Range : 0 ~ 3GHz
3. Working Voltage : AC60V Maximum
4. Dielectric Withstanding Voltage : AC200V Maximum
5. Insulator Resistance : 500 Megohms Minimum

ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY
5	HEAT SHRINK TUBE	22C046-001	BLACK	1
4	I-PEX CABLE BLUE	IPEX IPEX113A-0300C	BLACK	1
3	I-PEX CABLE GREEN	IPEX IPEX113A-0320C	BLACK	1
2	I-PEX CABLE WHITE	IPEX IPEX113B-0320C	BLACK	1
1	I-PEX CABLE YELLOW	IPEX IPEX113A-0325C	BLACK	1

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	DIMENSIONS	ANGLE	ANGULAR DIMENSIONS
INTEGRAL	±1.0		±5.0°
1 PLACE	±0.5		
2 PLACE	±0.25		
		HOLES UNDER	±0.5 ±0.1
		ROUGHNESS	



TITLE: IPEX TO IPEX FOR Ø1.13 CABLE
Model No: IPEX IPEX113A-7000

DRAWN BY:	TINA	DATE:	02-22'2008	UNIT:	MM	SIZE:	A4	REV.	A	CAD FILE :
ENGR BY:	TINA	DATE:	02-22'2008	SCALE:	6:1	SHEET	1	OF	1	Z:\NEW DWG\CABLE\IPEX
APVD BY:		DATE:								

ROHS
COMPLIANT
2002/95/EC