



REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-12067)	TINA	12-560	09-18'2012

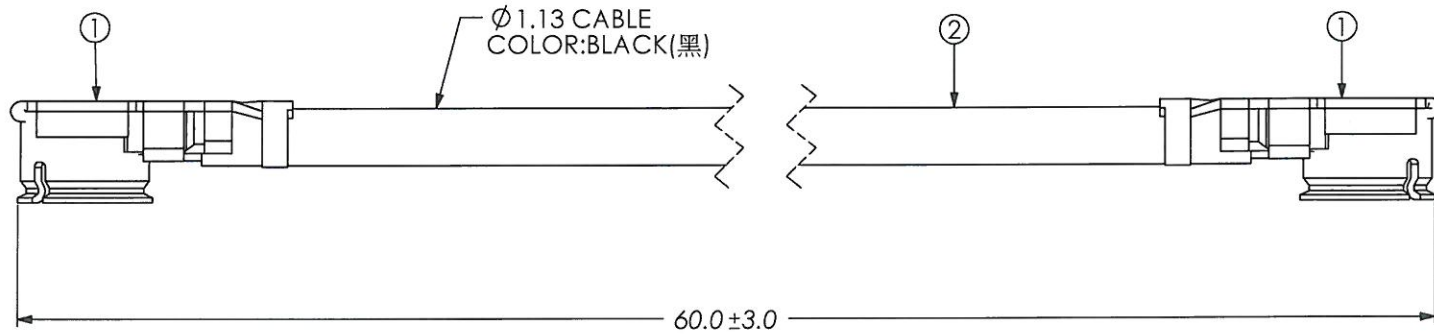

ELECTRICAL PERFORMANCE :

1. Impedance : 50 ohms
2. Frequency Range : DC~ 6 GHz
3. Working Voltage : AC60V Maximum
4. Dielectric Withstanding Voltage : AC200V Maximum

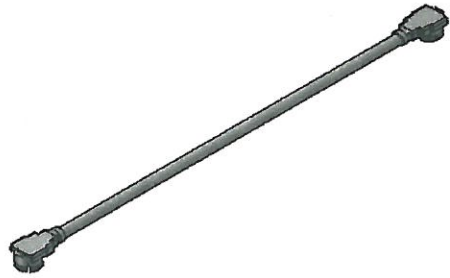

ITEM	DESCRIPTION	FINISHED	Q'TY
2	Ø 1.13 CABLE	BLACK	1
1	IPEX Connector (20278-112R-13)	GOLD	2

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION	TOLERANCE	ANGLE	TOLERANCE
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	

	FINISH: SEE TABLE		MATERIAL: SEE TABLE
--	-------------------	--	---------------------

nicon Precise Corp.

DWN BY:	TINA	DATE:	09-18'2012
CHK BY:		DATE:	
APVD BY:	<i>J. S. S.</i>	DATE:	9/21/2012

TITLE: IPEX TO IPEX FOR Ø 1.13 CABLE 6.0CM

Model NO: IPEXIPEX113B-0060C

Drawing NO: IPEXIPEX113B-0060C

UNIT:	MM	SIZE:	A4	REV.	A	CAD FILE:	Z:NEW Dwg/CABLE/IPEX
SCALE:	7:1	SHEET	1	OF	1		