


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-8033)	TINA	08-214	08-26'2008

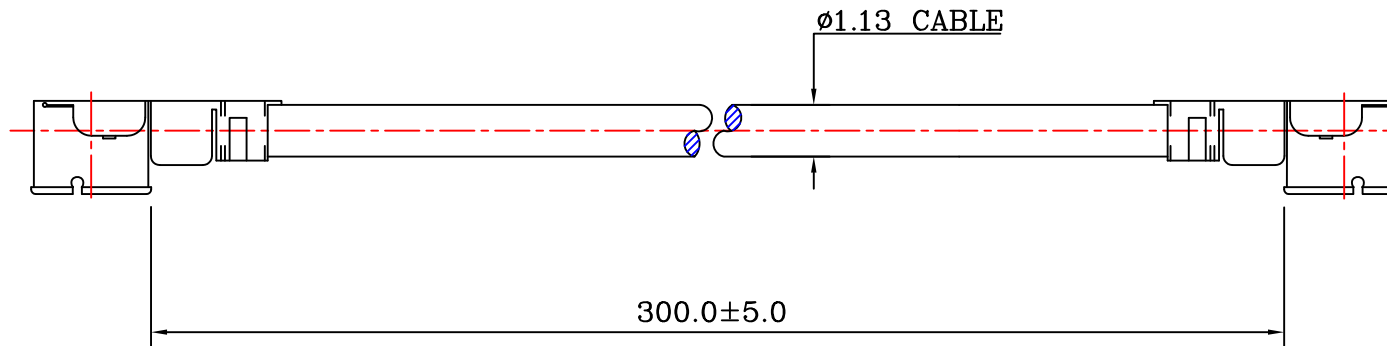

ELECTRICAL PERFORMANCE:

- 1.Impedance : 50 ohms
- 2.Frequency Range : 0 ~ 3GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum


2	CABLE	0000113A-3027M	BLACK	1
1	I-PEX	39001	GOLD	2
ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	ANGLE
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL ±0.5	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS ±0.25	ROUGHNESS



FINISH: SEE TABLE MATERIAL: SEE TABLE



Precise Corp.

TITLE:
IPEX TO IPEX FOR Ø1.13 30.0CM CABLE

Model NO: IPEXIPEX113B-0300C

Drawing NO: IPEXIPEX113B-0300C

DRAWN BY: TINA DATE: 08-26'2008

ENGR BY: TINA DATE: 08-28'2008

APVD BY: DATE:

UNIT: MM SIZE: A4 REV. A CAD FILE :

SCALE: 6:1 SHEET 1 OF 1 Z:\NEW DWG\CABLE\IPEX