



REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3005-12067)	TINA	12-560	09-18'2012

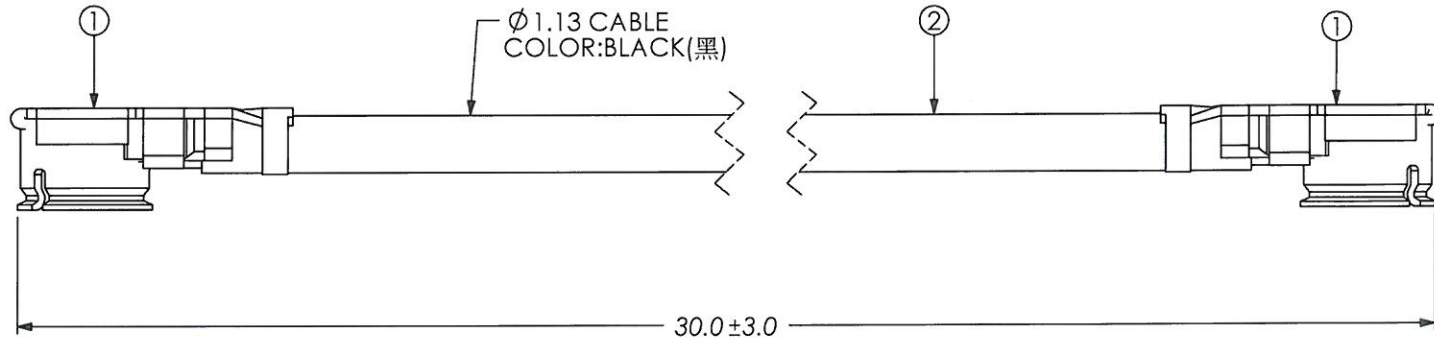

ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : DC~ 6 GHz
- 3.Working Voltage : AC60V Maximum
- 4.Dielectric Withstanding Voltage : AC200V Maximum

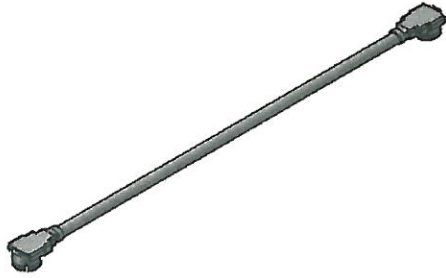

ITEM	DESCRIPTION	FINISHED	Q'TY
2	Ø1.13 CABLE	BLACK	1
1	IPEX Connector (20278-112R-13)	GOLD	2

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION	TOLERANCE	ANGLE	TOLERANCE
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	

FINISH: SEE TABLE MATERIAL: SEE TABLE

nicon Precise Corp.

DWN BY: TINA DATE: 09-19'2012
 CHK BY: DATE:
 APVD BY: J.ris DATE: 9/30/2012

TITLE: IPEX TO IPEX FOR Ø1.13 CABLE 3.0CM

Model NO: IPEXIPEX113C-0030C

Drawing NO: IPEXIPEX113C-0030C

UNIT: MM SIZE: A4 REV. A
 SCALE: 7:1 SHEET 1 OF 1
 CAD FILE: Z:NEW Dwg/CABLE/IPEX