


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE(3005-11081)	TINA	11-523	11-01'2011



ELECTRICAL PERFORMANCE :

- 1.Impedance : 50 ohms
- 2.Frequency Range : DC~ 6GHz
- 3.Working Voltage : AC60V MAX.
- 4.Dielectric Withstanding Voltage : AC200V Maximum

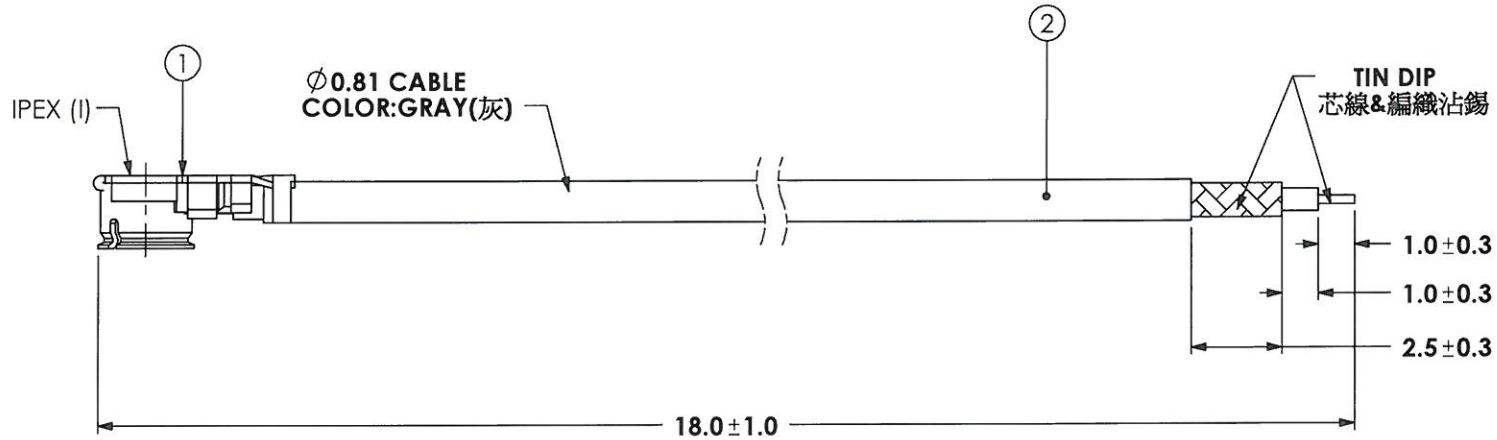

ITEM	DESCRIPTION	PART NUMBER	FINISHED	Q'TY
2	$\phi 0.81$ CABLE	$\phi 0.81$ CABLE	GRAY	1
1	I-PEX (I)	20278-112R-08	GOLD	1

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :			
DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	± 1.0	ANGULAR DIMENSIONS	$\pm 5.0^\circ$
1 PLACE DECIMAL	± 0.5	HOLES UNDER $\phi 0.5$	± 0.1
2 PLACE DECIMALS	± 0.25	ROUGHNESS	
	FINISH: SEE TABLE	MATERIAL: SEE TABLE	

nicon Precise Corp.

DRAWN BY:	TINA	DATE:	11-01'2011
ENGR BY:	TINA	DATE:	11-01'2011
APVD BY:	Tina	DATE:	11/3/2011

TITLE: IPEX FOR $\phi 0.81$ CABLE 1.8cm , GRAY			
Model NO: IPEX00081A-0018C			
Drawing NO: 12-IPEX00081A-0018C			
UNIT:	MM	SIZE: A4	REV. A
SCALE:	5 : 1	SHEET	1 OF 1
CAD FILE: NEW DWG/CABLE/IPEX IPEX00081A-0018C			