
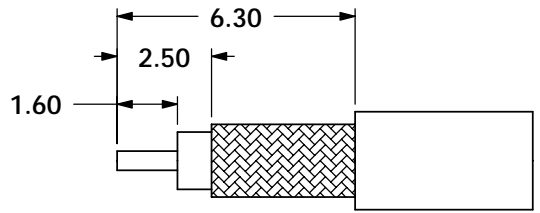

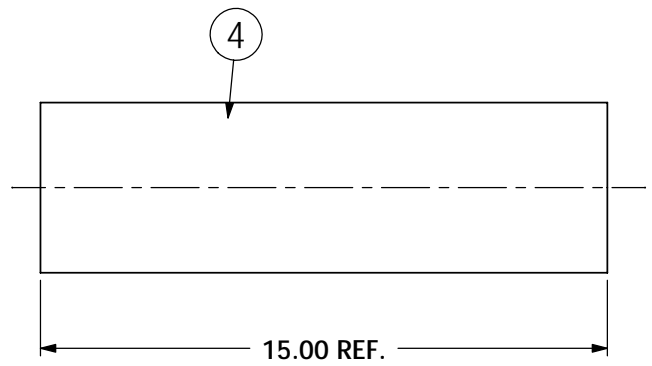
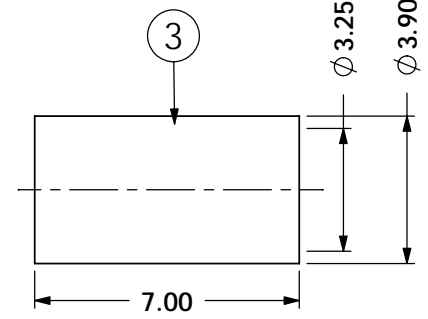

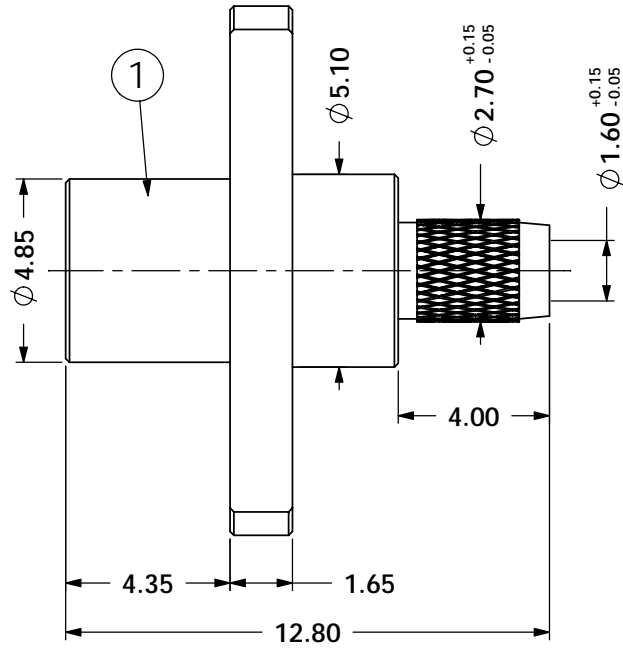


REV.	DESCRIPTION	DRAWN	ECN	DATE
1	SAMPLE RELEASE(3002-7040)	Iris	S07-023	05-22'2007
A	NEW RELEASE(3005-7067)	TINA	07-187	08-16'2007

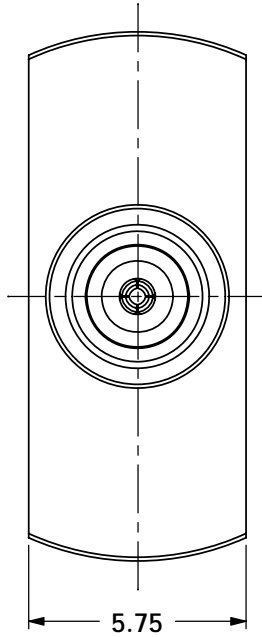

RECOMMENDED CABLE STRIPPING DIM'S
=====

ELECTRICAL PERFORMANCE :
 1.IMPEDANCE : 50 ohms
 2.FREQUENCY RANGE : 0~ 6GHz
 3.WORKING VOLTAGE : 335 Vrms MAX
 4.DIELECTRIC WITHSTANDING VOLTAGE : 750 Vrms MAX.

4	HEAT SHRINK TUBE	PE.	BLACK
3	FERRULE	BRASS	NICKEL
2	CONTACT	BERYLLIUM COPPER	GOLD 30u"
1	INSULATOR	TEFLON	NATURE
	BODY	BRASS	NICKEL
ITEMS	DESCRIPTION	MATERIAL	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :			
DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	
	FINISH: SEE TABLE	MATERIAL: SEE TABLE	

nicon Precise Corp.

DRAWN BY:	Iris Wang	DATE:	05-23'2007
ENGR BY:	Iris Wang	DATE:	05-23'2007
APVD BY:		DATE:	

TITLE: MCX ST. JACK CRIMP TYPE FOR RG174/U			
Model NO: 28202			
Drawing NO: 12-28202			
UNIT:	MM	SIZE: A4	REV. A
SCALE:	5:1	SHEET	1 OF 1
CAD FILE: J:/NEW DWg/28XXX /28202			