
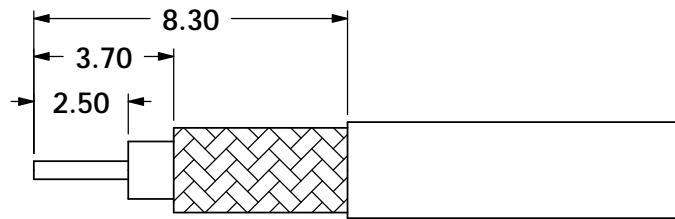

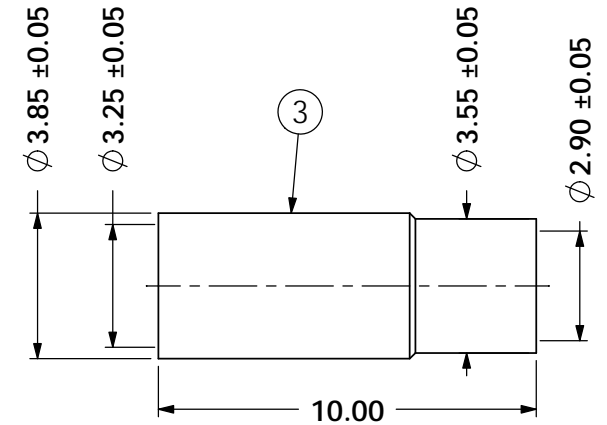
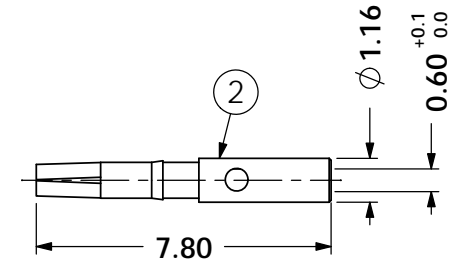
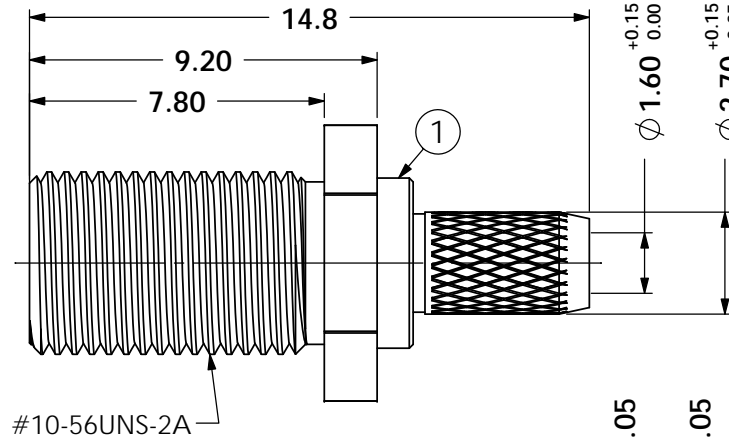
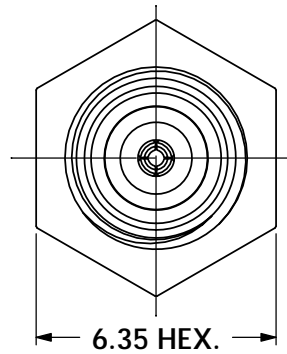


REV	DESCRIPTION	DRAWN	ECN	DATE
2	SEE ECN	Luke	S-01171	10-09'2001
A	New release (3007-9241)	IRIS	09-145	05-20'2009

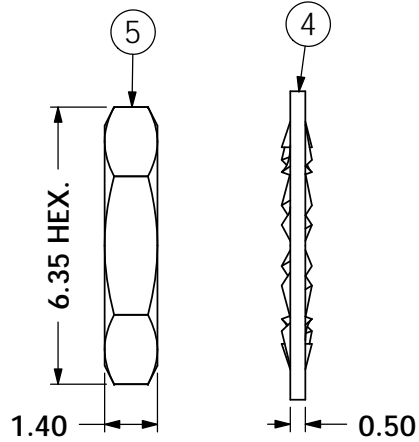

Rcommended Cable Stripping Dim's  
=====

**ELECTRICAL PERFORMANCE :**

- 1.IMPEDANCE : 50 ohms
- 2.FREQUENCY RANGE : 0- 6GHz
- 3.WORKING VOLTAGE : 335 Vrms MAX
- 4.DIALECTRIC WITHSTANDING VOLTAGE : 750 Vrms MAX.

5	NUT	BRASS	GOLD
4	LOCK WASHER	BRASS	GOLD
3	FERRULE	BRASS	GOLD
2	CONTACT	BERYLLIUM-COPPER	GOLD 30u"
1	INSULATOR	TEFLON	NATURAL
	BODY	BRASS	GOLD
ITEMS	DESCRIPTION	MATERIAL	FINISHED

**RoHS**

COMPLIANT

2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER $\phi 0.5$	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	

	FINISH: SEE TABLE	MATERIAL: SEE TABLE
--	-------------------	---------------------

**nicon** Precise Corp.

DRAWN BY:	Luke	DATE:	09-03'2001
ENGR BY:	Luke	DATE:	09-03'2001
APVD BY:		DATE:	

TITLE: MCX ST. JACK BULKHEAD CRIMP FOR  
RG174/U· GR316/U CABLE

Model NO: 28203

Drawing NO: 12-28203

UNIT:	MM	SIZE:	A4	REV:	A
SCALE:	5:1	SHEET:	1	OF 1	

CAD FILE:  
New dwg/28xxx  
/28203