

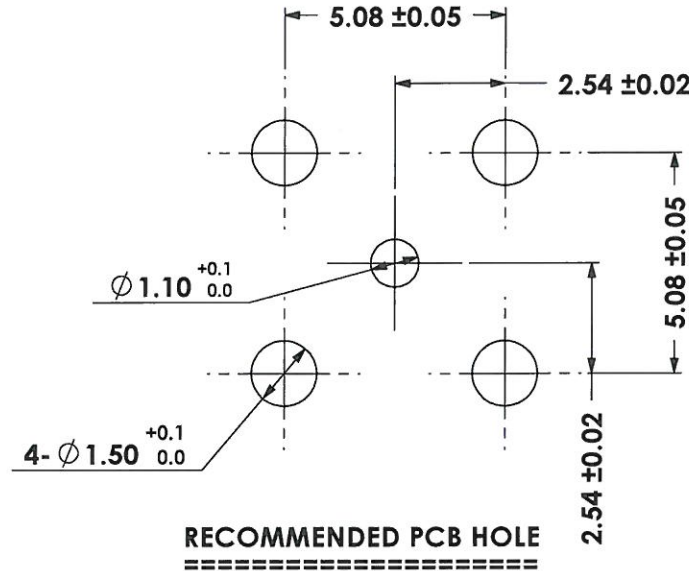


REV.	DESCRIPTION	DRAWN	ECN	DATE
3	SAMPLE RELEASE (3002-11062)	KEN	S11-078	09-28'2011
A	NEW RELEASE (3007-12179)	KEN	12-243	04-20'2012
B	SEE ECN (3007-12256)	KEN	12-290	05-08'2012
C	SEE ECN (3007-12268)	KEN	12-298	05-10'2012

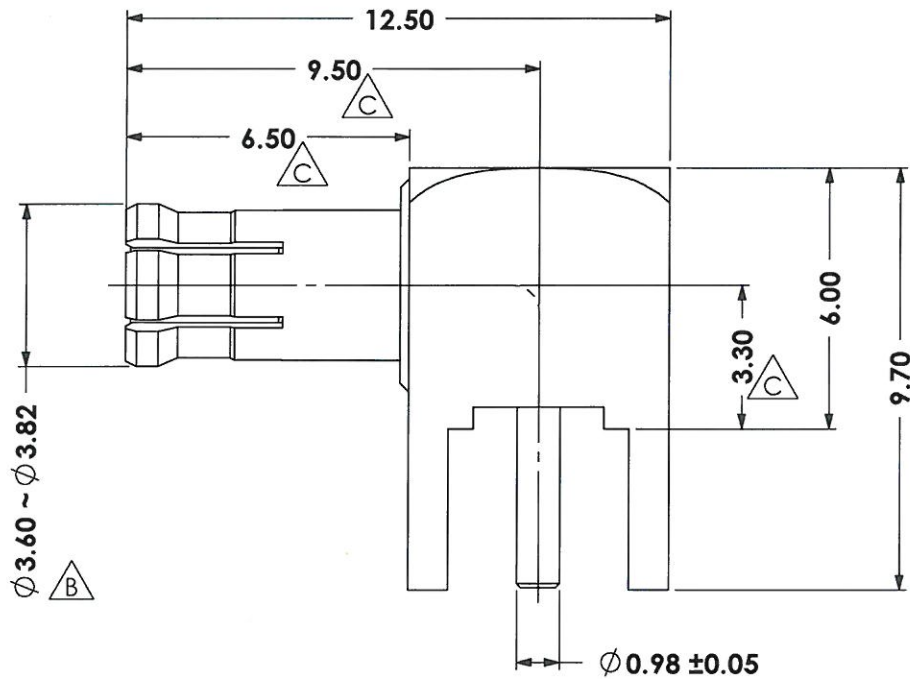

ELECTRICAL PERFORMANCE :

1. Impedance : 50 ohms
2. Frequency Range : DC~ 6GHz
3. Working Voltage : 335 Vrms MAX.
4. Dielectric Withstanding Voltage : 1000 Vrms MAX.

DESCRIPTION	MATERIALS	FINISHED
CONTACT	BRASS	GOLD FLASH
INSULATOR	TEFLON	NATURAL
INSULATOR	TEFLON	NATURAL
OUTER CONTACT	P.BRONZE	GOLD FLASH
BODY	BRASS	GOLD FLASH
DESCRIPTION	MATERIALS	FINISHED

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE :

DIMENSION	TOLERANCE	ANGLE	TOLERANCE
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	
FINISH: SEE TABLE		MATERIAL: SEE TABLE	

nicon Precise Corp.

DRAWN BY:	KEN	DATE:	07-01'2011
CHK BY:	<i>John</i>	DATE:	5/14/2012
APVD BY:	<i>John</i>	DATE:	5/14/2012

TITLE: MCX R/A PLUG PCB RECEPTACLE			
Model NO:		28110	
Drawing NO:		12-28110	
UNIT:	MM	SIZE:	A4
REV.	C	SHEET	1 OF 1
CAD FILE: NEW DWG / 28XXX / 28110			